


Table of contents

OUR STORY	5
The first company to produce battery-only plants	6
OUR TECHNOLOGY	g
The first battery platform	10
Our eco-sustainable technology	12
Maximum power used	14
Anti-blackout system	17
Other advantages offered by Mangusta	18
CONFIGURATIONS	2
Tailor-made projects	22
Configurations	26
Automatic doors	28
Swing doors	30
Cabin	34
Metal structure	42
FINISHES & ACCESSORIES	45
Finishes	46
Accessories	56
TECHNICAL SPECIFICATIONS	6



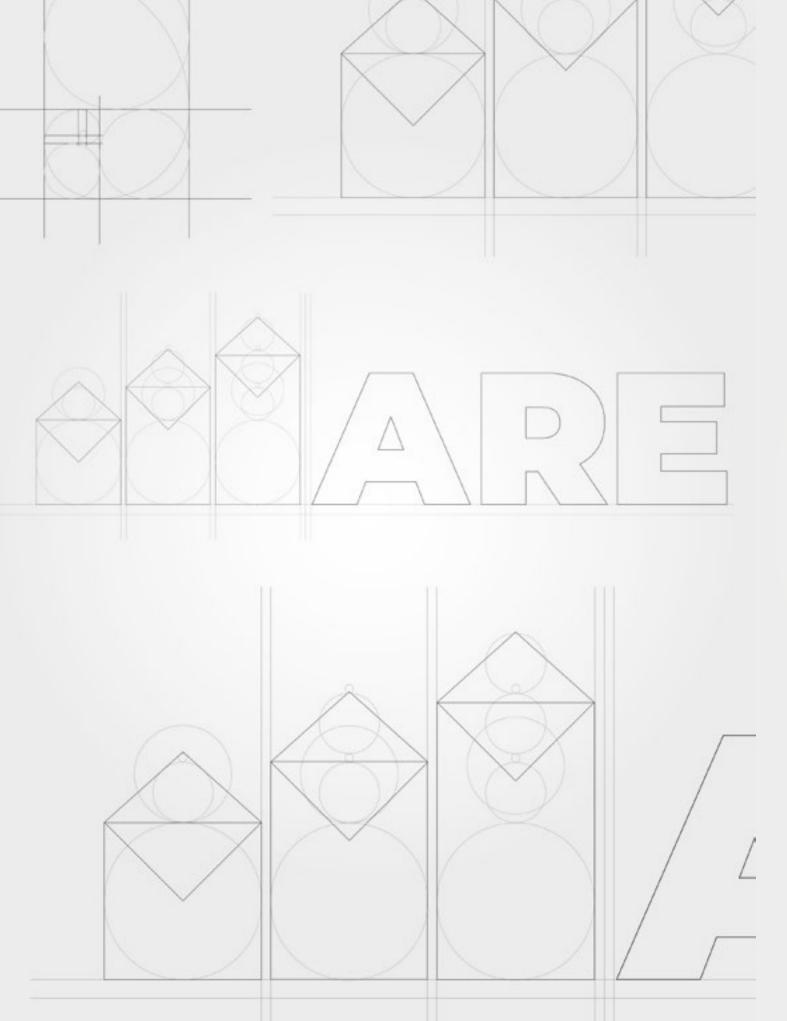

THE **FIRST** COMPANY TO PRODUCE **BATTERY-ONLY** PLANTS

A.R.E Srl was founded in 2009 thanks to the Franco Antonelli's futuristic vision.


Born in 1938, Franco had been acquiring experience in the sector since 1953 when, in 1995, he was the first person to develop a technology which allowed platforms, up until that point considered unsafe and with limited installation potential, to surpass the 4-metre limit and become reliable and incredibly energy-efficient products.

In 2003, he introduced another important innovation into the elevation sector, using batteries as the main source of power for Lifts.

Up until that point, batteries had been used on the side lines and only for lifting platforms. Franco's vision materialised into a successful venture: A.R.E., acronym for Ascensori a Risparmio Energetico (N.d.T. Energy-Saving Lifts) is a young, dynamic company investing constantly in the development of new solutions and technologies capable of guaranteeing its lifts maximum efficiency and respect for the environment.



lifestyle solutions, where energy saving and ecological sustainability lie at the heart of the choice of product to be installed in your home or workplace.

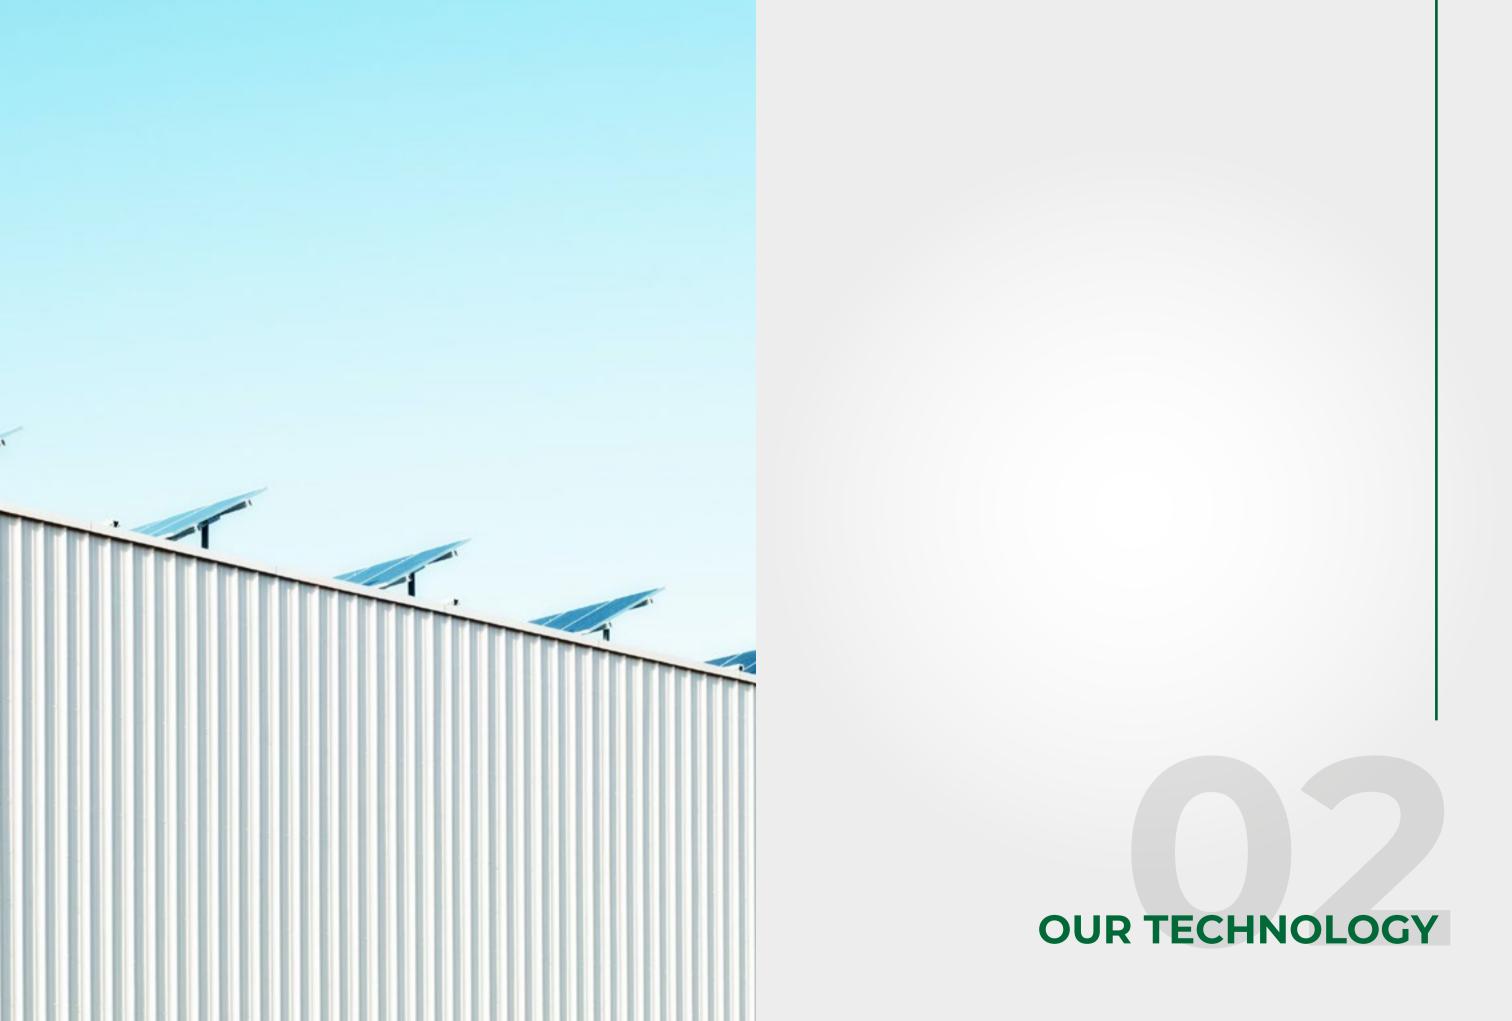

THE **FIRST** BATTERY PLATFORM

MANGUSTA is an electrically battery-powered Platform launched on the market for the first time in 2009. MANGUSTA, like all our lifts, benefits from **ARE SMART POWER** technology.

This technology offers many advantages:



ANTI BLACK-OUT SYSTEM

The MANGUSTA Platform's main power supply is based on the use of batteries. It is, therefore, possible to continue using the lift even if there is an unexpected power cut, which guarantees accessibility and safety at all times.



COMMITED POWER

MANGUSTA consumes just 230W, on a par with that needed to use everyday electrical appliances.



SOLAR PANELS

The possibility of having the MANGUSTA platform with solar panels means SOLAR POWER can be used as a source of SUSTAINABLE ENERGY.



ENERGY RECOVERY SYSTEM

While in use, the energy produced by MANGUSTA is not wasted as heat but stored in the batteries by optimising the performance levels of the lift and dramatically bringing down electricity supply costs.



HIGHEST ENERGY EFFICIENCY

MANGUSTA offers higher performance levels than those of an oleodynamic lift with lower electricity consumption.

10 / 11











Highest Energy Efficiency





Charging From Panels

OUR **ECO-SUSTAINABLE**TECHNOLOGY

WE PROTECT THE ENVIRONMENT IN ORDER TO PROTECT OUR FUTURE

ARE is constantly investing in research into eco-sustainable solutions that significantly contribute to reducing the impact on the environment. Our technicians have taken this direction in developing ARE SMART POWER.

The energy recovery System and the presence of solar panels ensure that the minimum amount of electricity is absorbed from the power grid.



ENERGY RECOVERY SYSTEM

The MANGUSTA Platform can generate energy during normal usage phases: when the cabin is going up empty or when it is going down and is full. The energy produced is not lost but stored in the batteries.


Thanks to the use of this technology, on average, one in every five times it is used, it does not absorb energy from the grid but uses what has been stored in the batteries. Self-powering guarantees a real reduction in consumption which translates into lower running costs.



CHARGING FROM SOLAR PANELS

The ARE SMART POWER technology allows you to make the most of the renewable energy generated by the sun to recharge the batteries and minimise the amount absorbed from the power grid, all done by simply installing a solar panel.

This solution not only reduces the cost of electricity needed to use the Lift but guarantees respect for the environment by taking a large leap towards a sustainable economy and use of circular energies.

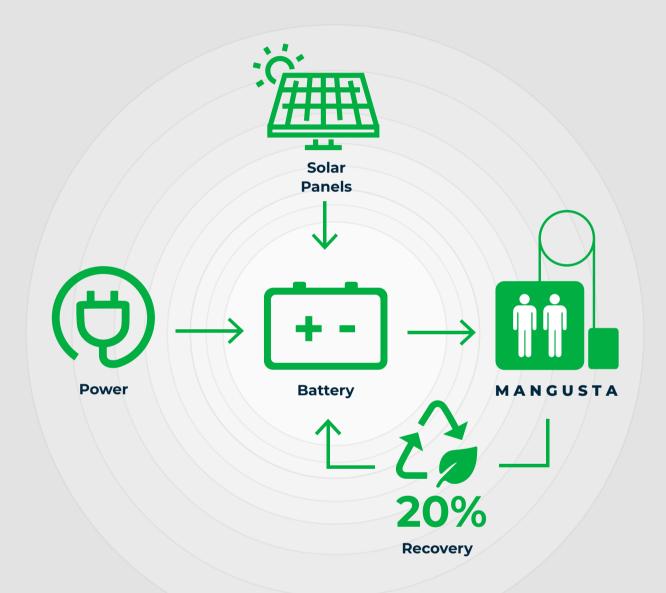



MAXIMUM POWER USED

The power given on the electricity supplier's meter is the level of power indicated

in the supply contract.

Most of the contracts for residential homes have a power usage of around 3 kW with a tolerance of +10%, that is, it is possible to withdraw up to 3.3 kW without any time limits. Over and above this limit, the supplier automatically cuts the energy supply by making the meter switch "trip" which then needs to be manually reactivated. Frequent cut-offs indicate a need for more power to meet the higher demands. In these cases, a request will need to be made to the supplier to increase the power supply by changing the existing contract and this will involve higher

Thanks to the technology developed by A.R.E, the maximum power used by MANGUSTA is just 0.13 kW, on a par with that of an average electrical appliance. There is no need, therefore, to change the supply contract stipulated, nor is there any need to install another meter with a higher power level. This is an advantage as the supplier's management costs for supplying electricity will not increase.

MANGUSTA | Other lifts



MANGUSTA | Other household appliances



M A N G U S T A - ENERGY SAVING LIFT




ABS

ANTI-BLACKOUT SYSTEM

A.R.E. technology, unlike that used by other manufacturers, relies on the use of BATTERIES as the main power system for its lifting systems and only uses the power grid to run the battery charging system.

That technology guarantees that **MANGUSTA** can operate normally even in the event of a power cut (on average for more than 20 uses).

This is the concept of "ALWAYS WORKING" common to all A.R.E. Lifts.

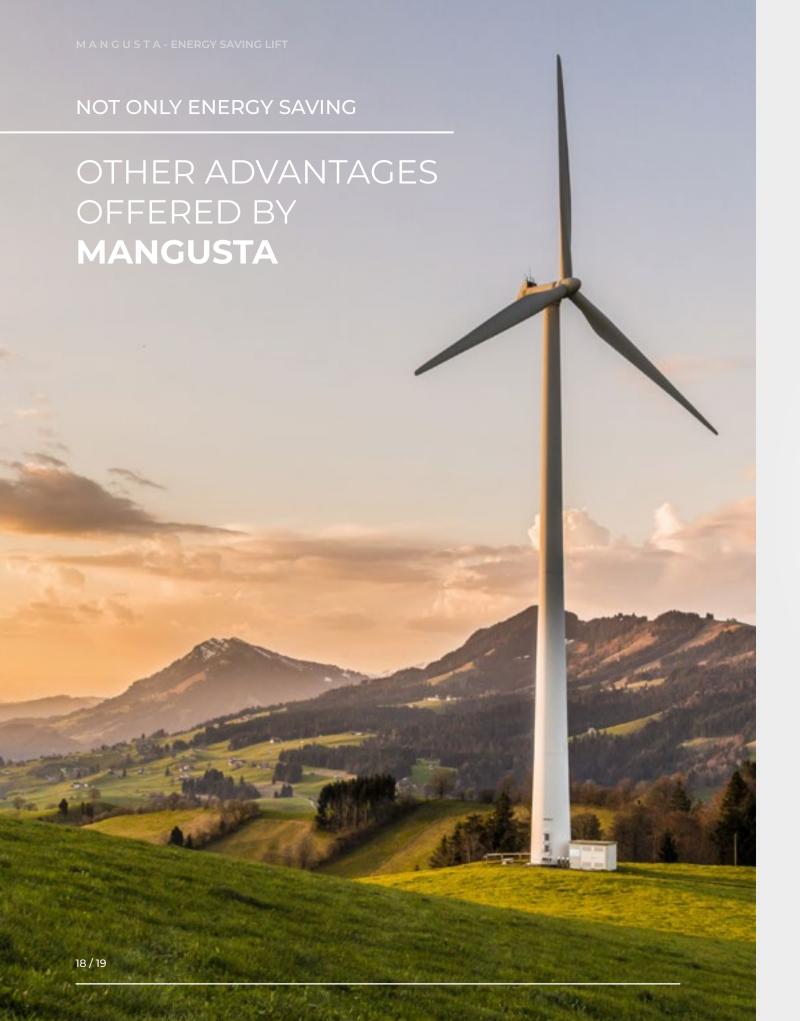



MOTOR ROOM LESS

With MANGUSTA, there is no need for space to house oleodynamic control units and manoeuvring switchboards. The motor unit is located inside the lift well and the manoeuvring switchboard can be incorporated into a floor door.



COMFORTABLE AND QUIET

Soft departure and arrival, stopping precision and silence are the distinctive features of MANGUSTA, designed and manufactured to offer maximum comfort.



SAFETY

MANGUSTA has a speed limiter which prevents uncontrolled cabin movement wherever it is. This limiter equates to compulsory devices found in lifts which comply with EN81-20:2014, 5.6.



ECO-FRIENDLY AND CLEAN

MANGUSTA respects the environment because it does not use any kind of oil, even as a lubricant for the guides.






CONFIGURATIONS

TAILOR-MADE PROJECTS

You are unique just like our products designed for you are unique. Every client and each project require a specific solution. We are here for this, to look after your needs and satisfy your demands.

Each MANGUSTA, designed by us, is a unique piece, designed specifically for you. Our technology is here to assist you and the wide range of materials and colours makes choosing the solutions that can meet any demand easier.



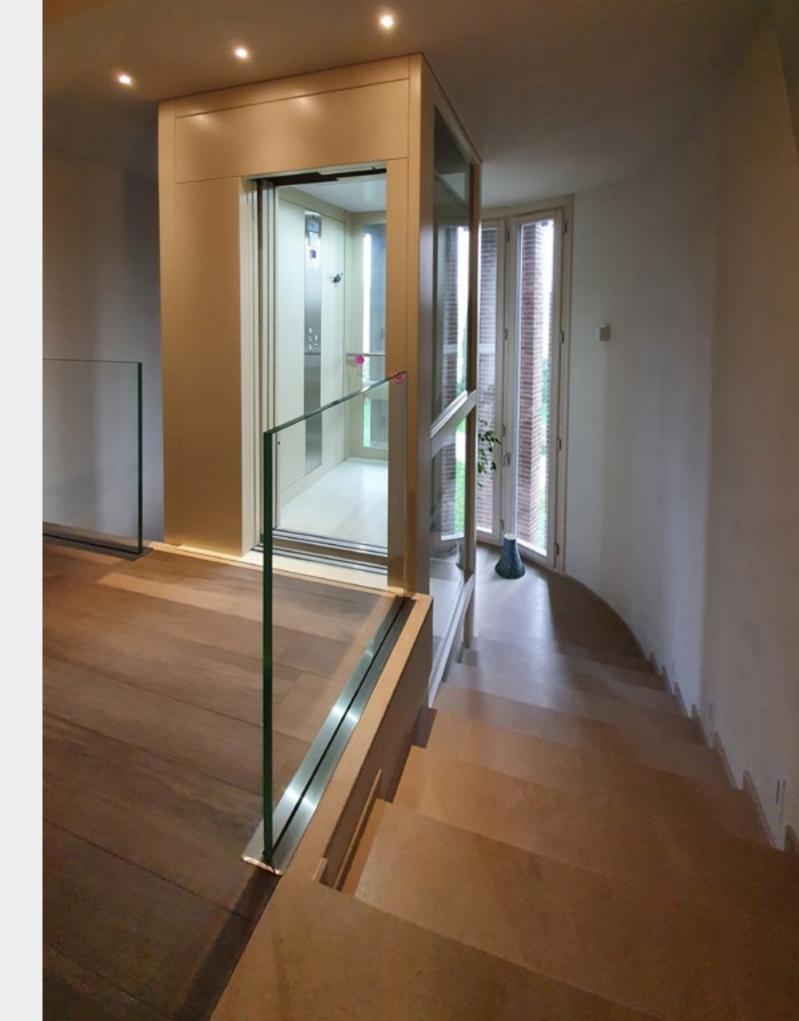



VARIANTS

Possible MANGUSTA Platform configurations are as follows:

NO DOORS

With this version, the cabin's manoeuvring is manual (defined as "with human presence") and there is always a full-height, multi-ray barrier photocell.

FOLDING CAR DOORS

The folding cabin door offers the chance for automatic manoeuvre in the cabin even in limited spaces.

AUTOMATIC DOORS

MANGUSTA is completely automatic in this version

VARIANTS	USER'S MANEUVER				
	CAR	LAND			
No doors	Manual	Automatic			
Folding car doors	Automatic	Automatic			
Automatic doors	Automatic	Automatic			

MANUAL: Keep the button pressed for the entire duration of the course.

AUTOMATIC: Press the button to activate the plant, just like a lift.



Automatic doors



Folding car doors



No doors

AUTOMATIC DOORS

Automatic floor and cabin doors complete with threshold unit floor-flush frame suspension with stainless-steel facing and threshold cover. Available with telescope closure with 2 wings or 3 wings and central closure with 2 and 4 wings. Folding cabin doors with electronic command system complete with operator wings and threshold, movement controlled by a mobile frame.

STANDARD



FIRE RESISTANT



Automatic fire door El 60 e

Automatic fir EI-120.

MINATED GALVANISED & RAL PAINT FINISH

GLASS & METAL



Panoramic laminated glas and metallic frame.

TOTAL GLASS



Laminated clear glass, polished stainless steel upper and lower fixing devices.


FOLDING DOOR



PANORAMIC FOLDING DOOR





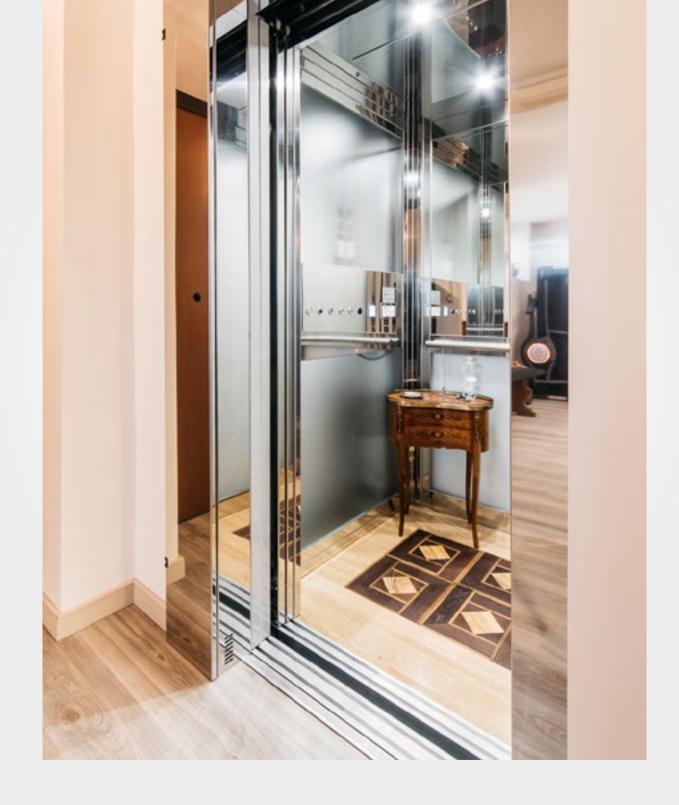




SWING DOORS

Semi-automatic swing doors, manual opening and automatic closure by return spring. Adaptable to any environment, with combinations of finishes, colours, glass and sizes.

WINDOW







FIRE RESISTANT

electrical safety lock. Semiautomatic, manual opening and automatic closing with return spring and damper, uprights with carters.







THERMAL BREAK

EI-120 Fire resistant single panel swing door with Thermal break door to a hinged degree of transmittance thermal U = 2,12 W/mgk mineral wool in the leaf and in the frame (box). Gaskets of parafreddo stop along the door perimeter and lower floor hood profile.



ARMOURED

Armored door with reinforced frame and door leaf, steel hinge. Armored lock with 4 pins with or without latch variant key/ key or external key inner shell. Semi-automatic, manual opening and automatic closing by return spring and shock absorber, uprights carterized. Vertical guardrails on request



32 / 33

ALLUMINIUM

Single panel Alluminium Panoramic model swing door with mechanical safety lock. Leaf made by extruded aluminium profile and panoramic glass without glazing beads, uprights and lintel made by extruded aluminium if the width is 100 mm, if different builted in steel sheet and aluminium covered, stainless steel sill profile. Semiautomatic, manual opening and automatic closing with return spring and damper. Uprights with carters.







CRYSTAL

Crystal model single panel swing door with safety lock. Leaf in tempered laminated 8+8 glass, stainless steel handle and hinges. Semiautomatic, manual opening and automatic closing with adjustable hydraulic door closer, located inside the lintel and provided with 90° stop. Uprights with carters.



CAR

MONOLITH

A modern design for an exclusive result

The Monolith cabin features a subtle and elegant line and can be customised to suit even the most demanding clients' requests.

The standard product can be enhanced by choosing the skirting board and button in different materials and colours from those on the walls.

Every detail has been thought out

The side panels are always designed in proportion to the central panel whatever the size of the cabin.

The same proportion continues in the cabin's roof profiles with a perfectly harmonious result.

Highly robust and silent

The walls with vertical slats are not only aesthetic and design elements, but also have the dual function of increasing sturdiness and simplifying the Monolith assembly process.

Furthermore, the exclusive design significantly reduces the noise caused by micro vibrations.

The final effect is to make MANGUSTA even quieter and more comfortable.



MANGUSTA - ENERGY SAVING LIFTS MANGUSTA - ENERGY SAVING LIFTS



Plinth: Scotch Brite stainless steel

Control panel: Scotch Brite stainless steel



stainless steel



ELEGANT

The new design proposal

Elegant is the new line of cabins in Laminated Plastic with a state-of-the art and elegant design.

The refinement of the modern design

Elegant Plus is the most innovative proposal with horizontal wall slats covered and profiled in plastic laminate. The walls are enhanced with finishings with stainless steel angles.

The refinement of the classic

Elegant Unique is the most classic proposal and always modern with walls covered in plastic laminate and enhanced with stainless steel angles and skirting board.

A unique cabin that is just as unique as your requirements

The new range of colours proposed for the walls includes both natural shades of wood and more sophisticated, paler colours.

The finishing in faux wood can perfectly reproduce the elegance of wood without compromising its resistance and enhancing the environment in which the cabin is installed.

In order to satisfy demands from the most exacting clients, both the colour of the walls and the finishings can be customised by choosing between Scotch-Brite stainless steel (standard supply) polished stainless steel and dam.

Each cabin is the result of a combination of a vast selection of materials with a unique and exclusive end product.






METAL STRUCTURE

MANGUSTA can be supplied complete with metal structure well suited to being positioned both inside and outside the construction.


In order to meet all our customers' requirements, descent walkways are available (with parapets in metal or glass) with completely closed walkways, complete with transom windows and rain canopies (with sheet metal or glass cladding) and RAL painted doors and frames.

All the structures comply with current construction standards. It is possible to request glass cladding (see pag. 49) and panels in RAL painted metal sheets.

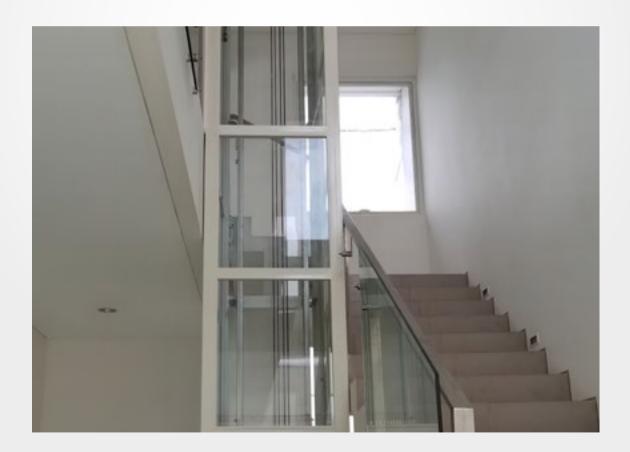






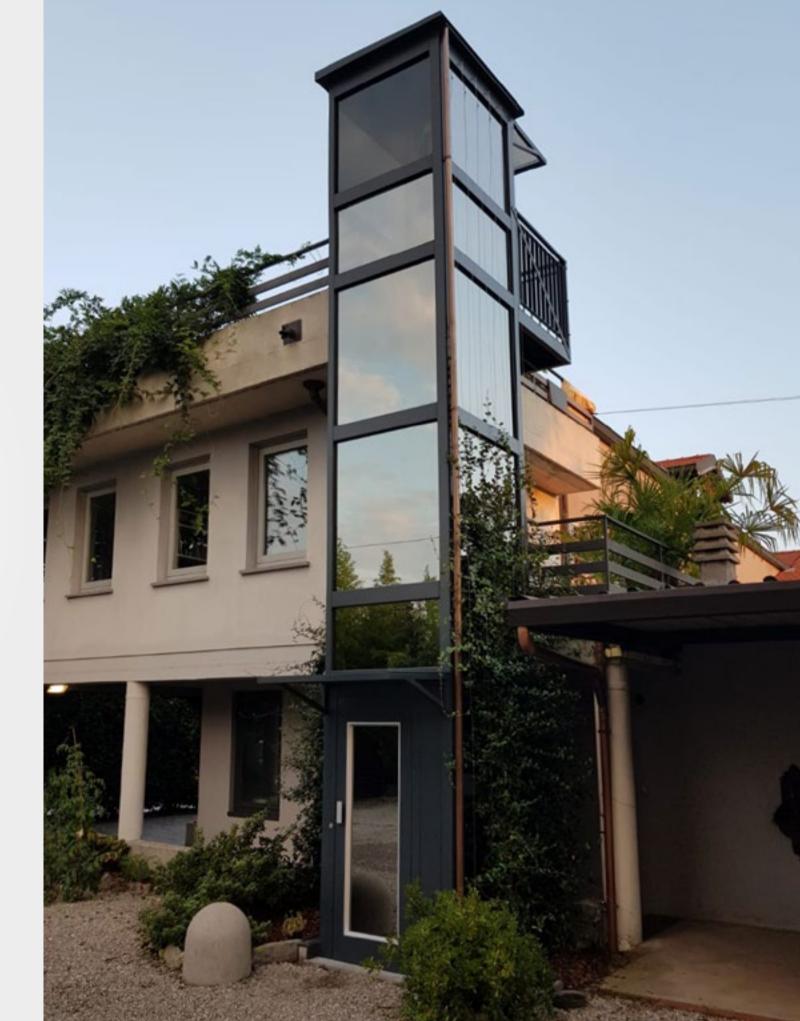



FINISHES

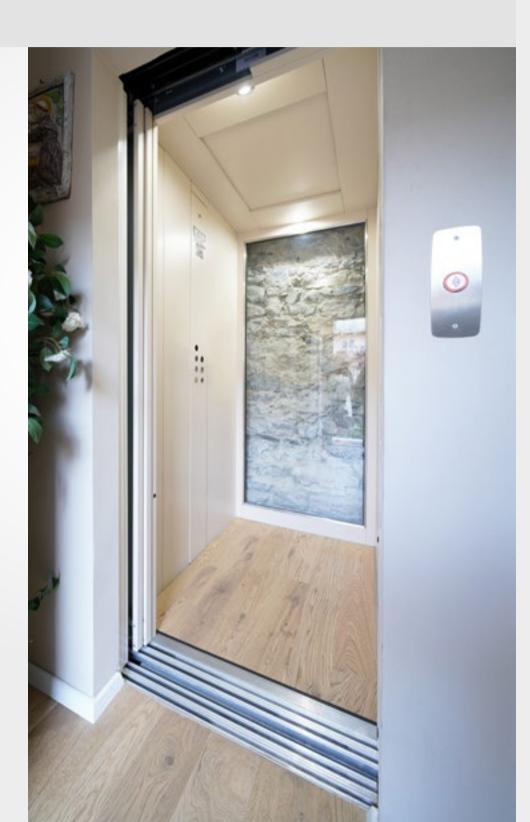


Ceiling: A49PP Shiny White

Walls: A49PP Shiny White


Floor: Coating by the client

LAMINATED SHEET

for automatic doors in the 115 System, Minisill, Glass & Metal models, please refer to the finishings for landind doors.

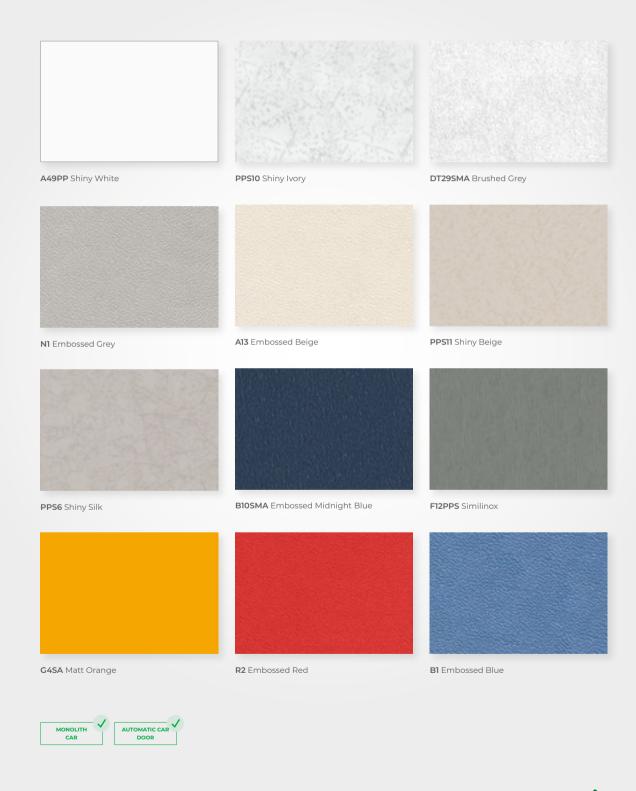

LAMINATED SHEET

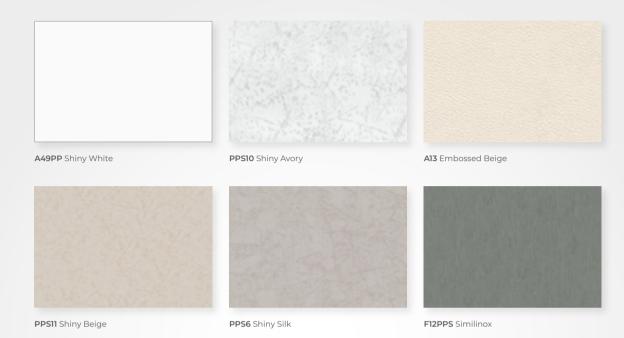




RAL PAINT FINISH 1

The colours shown may not be correctly represented. Please refer to the official RAL cards when choosing the RAL colour.



STAINLESS STEEL







Polished 7

Polished BA

Scotch Brite





Dam Stainless Steel


Stainless steel supply recommended

STAINLESS STEEL	For indoor	For outdoor	Seafront
AISI 430 Scotch Brite	✓	_	/ / / –
AISI 304 Polished BA	✓	✓	_ //
AISI 304 Polished 7	✓	✓	-
AISI 304 Dam Stainless Stell	✓	✓	_
AISI 304 Linen	✓	< ✓	_
AISI 316 Polished BA	✓	✓	✓



GLASS













Bronze Stop-Sol



Grey Stop-Sol


















PVC


These floors are a PUR Pearl surface, a combination of embossing and lacquering that guarantee the finished smooth and elegant matte feature that is highly resistant to scratches, tread and wear.

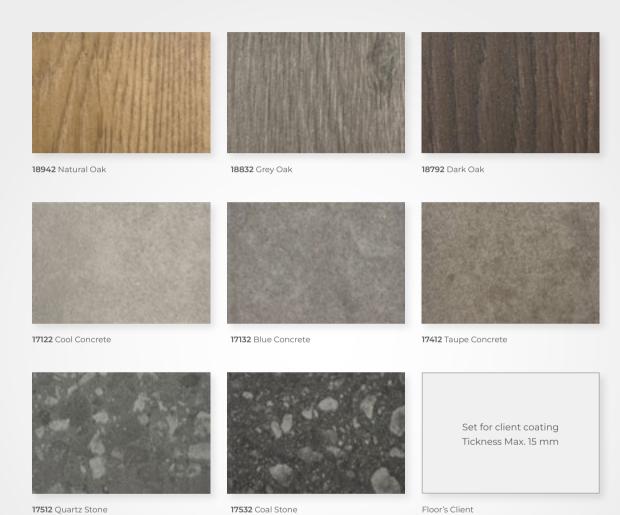




GRANIT TOUCH

A mix obtained using grits of granite, quartz, glass and interlacing of glass mosaic. Most of the raw materials used are obtained by recycling Post-Consumption products. The perfect combination of these materials creates the right balance between technology and respecting the environment.

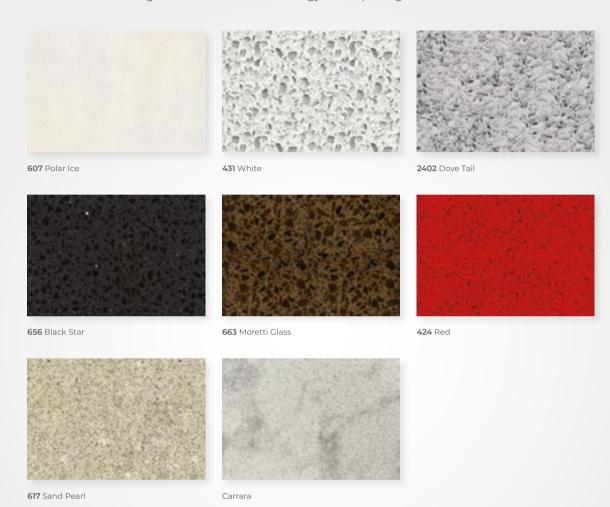



LAMINATED PLASTIC

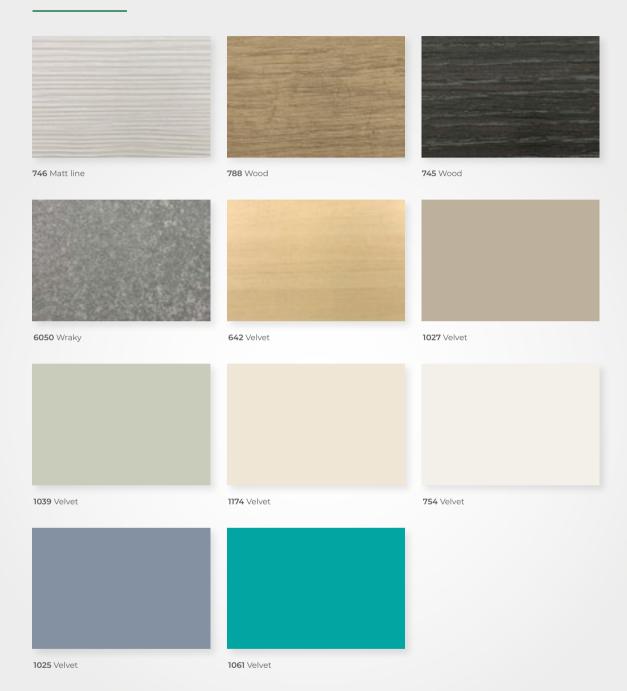



FINISHING SUMMARY

	LANDING	DOORS	DOOR	'S CAR	C.F	AR	CABINET	STRUCTURE
	Swing	Automatic	Automatic	Folding	Monolith	Elegant		
Rust-proof Paint Finish	✓	_	_	_	_	_	✓	_
Galvanised and RAL Paint finish	V	V	_	_	_	_	✓	✓
RAL Paint Finish	✓	✓	✓	✓	✓	_	✓	✓
Stainless Steel	V	✓	✓	✓	✓	_	✓	1
Laminated Sheet Metal	_	✓	✓	_	✓	_	✓	_
Laminated Plastic	_	_	✓	_	_	✓	_	_
Natural Aluminium	✓	_	_	_	_	_	_	_
RAL Paint Finish Aluminium	✓	_	_	_	_	_	_	_

¹On request



MANGUSTA - ENERGY SAVING LIFT

MANGUSTA - ENERGY SAVING LIFT

ACCESSORIES



DISPLAY

TFT

High-resolution display Available 7", 4.3" e 2.8"

TRICOLOR

LCD display Frame or flush anti-scratch and anti-impact transparent polycarbonate screen

ICARO

LCD display Frame or flush anti-scratch and anti-impact transparent polycarbonate screen









BEECH WOOD

HANDRAIL

STANDARD





OAK WOOD



Wood handrail (available with supports and polished stainless steel terminals)

BUTTONS

STANDARD



AISI 304 stainless steel button with

VANDAL-PROOF IP54



Vandal-proof button with braille with. degree of protection IP54.



MANGUSTA - ENERGY SAVING LIFTS MANGUSTA - ENERGY SAVING LIFTS

CAR DISPLAY

VENICE



White and black glass H 1900 mm with display TFT 7" (only for automatic car door)

AIDA



Scotch brite stainless steel H 1900 mm with display TFT 7" (other fornitures available polished stainless steel)

LANDING DISPLAY

AIDA 65

Polished stainless steel in a 65-mm width with flush Icaro display. Wall secured, without building work

(other available finishes: Scotch-Brite stainless steel)

AIDA 85

Scotch Brite stainless steel width 85 mm. Available with display 4.3" Wall secured, without building work

(other available finishes: polished stainless steel)


SOFT 75

Polished blue stainless steel, width 75 mm. Available with con icaro wire display Possibility of box to be

(other available finishes: Scotch-Brite stainless steel)

VENICE 80

In extra light white glass and float black glass. Width 80 mm. Available with TFT vertical display 2.8"











HANDLES

T20 - T30

Scotch brite stainless steel AISI 304 ø20 x L 300 ø30 x L 500



Scotch brite stainless steel AISI 304 ø30 x L 500 ø30 x L 1000



steel AISI 304 40 x 10 x L 500

Q20

Scotch brite stainless Scotch brite stainless steel AISI 304 20 x 20 x L 320



Scotch brite stainless steel AISI 304 40 x 15 x L 1260











ENABLING SYSTEM

I-BUTTON

ENABLE KEYS

ALPHANUMERIC KEYPAD

Until two contact



Floor Only one contact








AUTOMATIC SWING DOOR OPENING SYSTEM









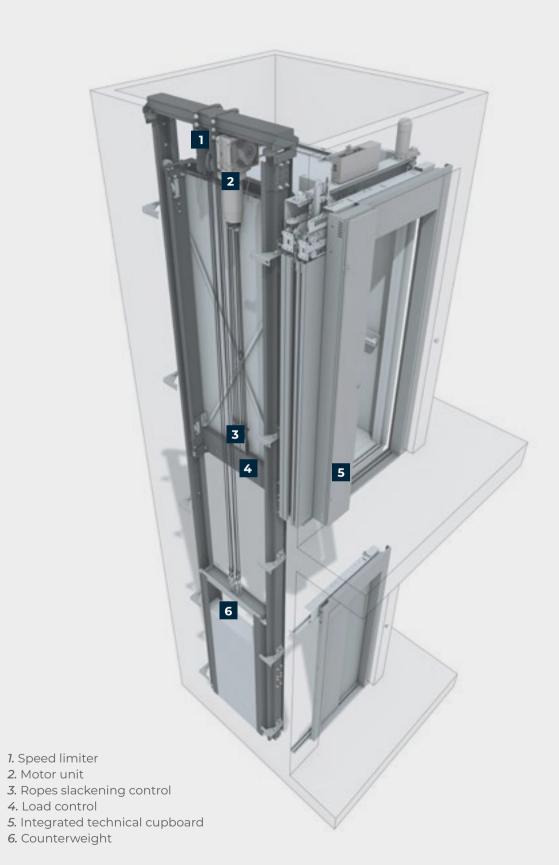

TECHNICAL FEATURES

Capacity	300kg	400kg
Reference legislation Direttive	a Macchine 2006/42	2/CE EN81-41:2011 (where applicable)
Capacity max (People)	4	5
Maximum Speed	0,30	0,30
Maximun number of stops	8	8
Hourly insertions	45	45
Travel (mm)	24.000	24.000
Headroom (mm)	2.600	2.600
Pit (mm)	150	150
Maximum car's area (m²)	1,2	1,6
Lift power supply	Battery	Battery
Committed power (kW)	0,23	0,23
Inrush absorption from the network (A)	0,7	2
Mains power supply (V)	230	230
Maximum travels in case of blackout	60	45
Recovery energy system	Standard	Standard
Anti Blackout System	Standard	Standard

min. interfloor	No door	Folding door	Automatic door
With doors on opposite sides and/or adjacent (mm)	300	150	150
With doors on the same side ¹ (mm)	H Door Frame + 100	H Door Frame + 100	H Opening + 350 ²

¹ Plants with close planes at both ends are not feasible ² H Opening + 400 with total glass doors

STANDARD HEADROOM

Variants	Headroom (mm)	H Car (mm)	H Door width (mm)
Manual Swing Door			
Folding Door	2600	2100	2000
Automatic Car Door 1			

MINIMUM HEADROOM

Variants	Headroom (mm)	H Car (mm)	H Door width (mm)
Manual Swing Door			
Folding Door	2400	2100	2000
Automatic Car Door 1			

REDUCED HEADROOM

Variants	Headroom (mm)	H Car (mm)	H Door width (mm)
Manual Swing Door	2200	2000	2000
Folding Door	2200	2000	1000
Automatic Car Door ¹	2300	2100	1900


¹+50 on headroom for total glass

Pit 150 mm for all elevators

NO DOOR

	CAPACITY			C	AR		EXISTING SHAFT		STRUCTURE						
Load (Kg)	People	Accessibility	X (mm)	Y (mm)	Opening (mm)	Access	X (mm)	Y (mm)	X (mm)	Y (mm)					
			800	1200		1F	970	1580	1150	1680					
250	3	Ė.	1200	050	750	1L	1350	1240	1460	1360					
			1200	850		20	1340	1240	1440	1360					
						1F	1110	1680	1200	1780					
350	4	• † Ł	1300	1300 9	1300	1300	950	950	1300 950	800	1L	1450	1340	1560	1440
						20	1440	1340	1540	1440					
						3	1340	1580	1440	1680					
			1200	1200	800	2A	1350	1580	1460	1680					
400	5	i.				1F	1260	1780	1350	1880					
			1400	1100	900	1L	1550	1490	1660	1590					
						20	1540	1490	1640	1590					
450	6	i.	1300	1300	900	2A	1450	1680	1560	1780					

It's possibile to download all the schematics on our website **www.areascensori.it** area **Download**

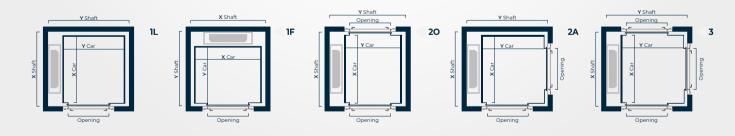




FOLDING DOOR

CAPACITY			C.	AR		EXISTING SHAFT		STRUCTURE					
Load (Kg)	People	Accessibility	X (mm)	Y (mm)	Opening (mm)	Access	X (mm)	Y (mm)	X (mm)	Y (mm)			
			800	1200	750	1F	970	1570	1150	1670			
250	3	Ŀ	1000	050		1L	1340	1240	1450	1360			
			1200	850	750	20	1320	1240	1430	1360			
	4	i İt.	950	1300	800	1F	1110	1670	1200	1770			
350 4			₽Ġ.	i.	i.	† ₺				1L	1440	1340	1550
					1300	950	800	20	1420	1340	1530	1440	
			1100	1400	900	1F	1260	1770	1350	1870			
					222	3	1320	1570	1430	1670			
400	5	5 1200	1200 1200	1200	800	2A	1340	1570	1450	1670			
						1L	1540	1490	1650	1590			
				1400	1100	900	20	1520	1490	1630	1590		
450	6	iŁ	1300	1300	900	2A	1440	1670	1550	1770			


It's possibile to download all the schematics on our website www.areascensori.it area Download

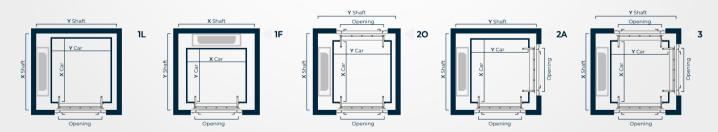

AUTOMATIC DOORS

(CAPACITY			C	AR		EXISTING SHAFT		STRUCTURE				
Load (Kg)	Persone	Accessibility	X (mm)	Y (mm)	Opening (mm)	Access	X (mm)	Y (mm)	X (mm)	Y (mm)			
			1000	1200	750	1F	1170	1820	1320	1920			
250	3	Ŀ.	1200	900	750	1L	1500	1300	1610	1440			
			1200	300	750	20	1640	1300	1740	1440			
	350 4	Å.	1000	1300	750	1F	1170	1920	1320	2020			
350			r.	1700	050	750	1L	1600	1340	1710	1440		
			1300	950	750	20	1740	1340	1840	1440			
			1100	1400	800	1F	1260	2020	1390	2120			
			1000	1000		3	1640	1730	1740	1830			
400	5	i.	1200	1200 1200	1200 1200	1200 1200	1200 1200 80	800	2A	1500	1730	1610	1830
				1100	200	1L	1700	1490	1810	1590			
			1400	1100	800	20	1840	1490	1940	1590			
450	6	İŁ	1300	1300	800	2A	1600	1830	1710	1930			

It's possibile to download all the schematics on our website www.areascensori.it area Download

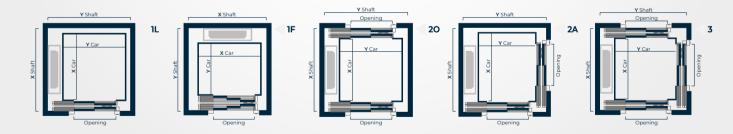



THE SMALLEST

Manual Swing Door

CAPACITY			CAR				EXISTING SHAFT		STRUCTURE	
Load (Kg)	People	Accessibility	X (mm)	Y (mm)	Opening (mm)	Access	X (mm)	Y (mm)	X (mm)	Y (mm)
150	2			550	500	1L	750	940	830	1030
				600	550	1F	770	980	830	1070
				550	500	20	740	940	820	1030
			600			2A	750	930		
				700	550	2A	770	1080	830	1170
				550	500	3	740	930		
				700	550	3	740	1080	820	1170


Folding Door

CAPACITY			CAR				EXISTING SHAFT		STRUCTURE	
Load (Kg)	People	Accessibility	X (mm)	Y (mm)	Opening (mm)	Access	X (mm)	Y (mm)	X (mm)	Y (mm)
	2	Ů	700	550	500	20	820	940	900	1030
150			700	550	500	1L	840	940	920	1030
			600	700	550	1F	770	1070	840	1160
			750	650	500	2A	900	1020	970	1110
			850	650	500	3	970	1020	1050	1160


Automatic Car door

CAPACITY			CAR				EXISTING SHAFT STRUCTURE			CTURE
Load (Kg)	People	Accessibility	X (mm)	Y (mm)	Opening (mm)	Access	X (mm)	Y (mm)	X (mm)	Y (mm)
	2		670	750	550	1F	900	1370	970	1460
150			700	600	550	1F	900	1220	970	1310
					500	2A	1020	1140	1100	1230
		Ť	750	550	500	1L	1070	940	1150	1030
						20	1220	940	1300	1060
					500	2A	1070	1140	1150	1230
						3	1220	1145	1300	1235

SPECIALS

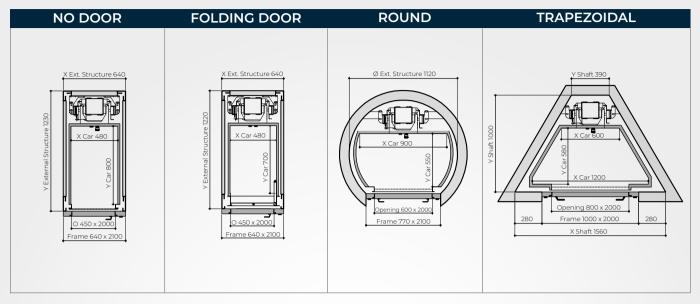


Min headroom 2600mm

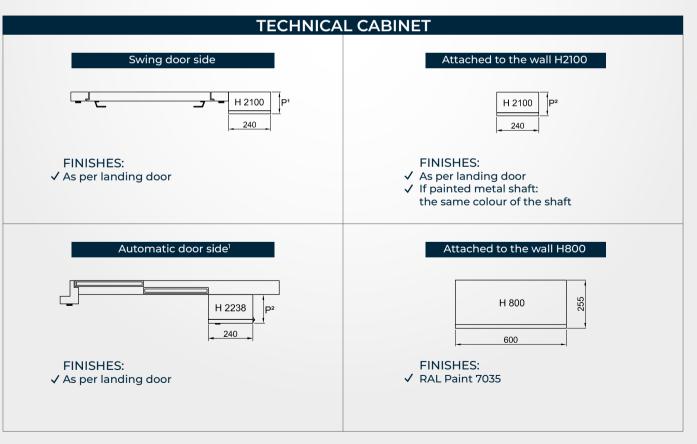

P¹ = 145 for load ≤ 400 kg; 170 for load > 400 kg

P² = 150 for load ≤ 400 kg; 175 for load > 400 kg

¹Cannot be done with Glass & Metal, Total Glass, 3AT doors, with non-standard door height and EI

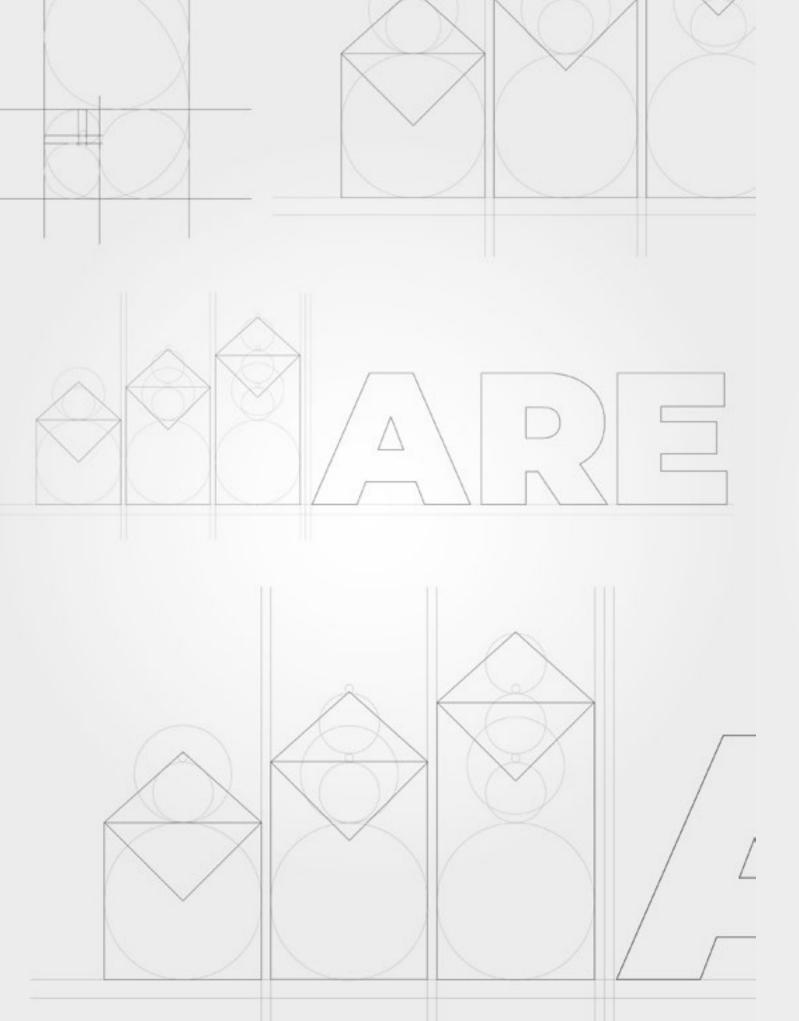





ARE Srl - Via E. Fermi, 29 51010 Massa e Cozzile (PT) Italia P.Iva: 01703750479 Tel: +39 0572 767991 commerciale@areascensori.it

ARE reserves the right to make changes to the product in any part and without notice. The representation and description of the products in the catalogue have an indicative value. A possible discrepancy of the finished product with respect to the representation does not constitute a ground for complaint, being the order made the only benchmark. © ARE LIFTS - All rights reserved